


Heavy duty range of
hoists for the most
demanding applications



TMH-3000



TMH-6000

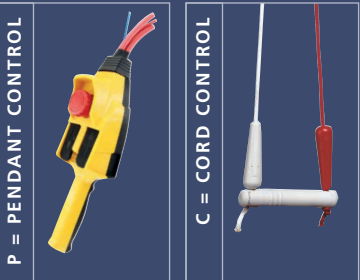

ATEX MARKING

FOR ATEX MARKING
SEE PAGE 16.

SECTION 2

PNEUMATIC CHAIN HOISTS

TMH-3000 | TMH-6000/2

The NEW RED ROOSTER TMH series air chain hoists have the highest lifting speed with the lowest headroom on the hoist market. With M4 classification of mechanism this hoist is extremely reliable. This hoist will guarantee the continuity of your process.

- STANDARD FEATURES:
- Precise variable speed control
 - Optimum control of the load, very precise positioning
 - Mechanical end stop system
 - Load limiter built-in without loss of headroom
 - Cord- and pendant control
 - Low noise level (83 dBA)
 - Air pressure 0,4 - 0,63 MPa
- RECOMMENDED SMC AIR
TREATMENT UNIT: AC60-
F10DM-8-B

Model*	WLL	Lifting speed with load	Lifting speed without load	Lowering speed with load
TMH-3000C TMH-3000PE	3.000 kg	5,4 m/min	10,8 m/min	10,2 m/min
TMH-6000C2 TMH-6000P2E	6.000 kg	2,8 m/min	5,4 m/min	5,1 m/min

Model*	Airconsumption lifting	Air consumption lowering	Air connection	Minimum hose diam
TMH-3000C TMH-3000PE	56 l/sec	68 l/sec	PT 1"	3/4"
TMH-6000C2 TMH-6000P2E	56 l/sec	68 l/sec	PT 1"	3/4"

Model*	Air pressure	Weight with 3m hol	Additional metre hol	Chain falls
TMH-3000C TMH-3000PE	0,4 - 0,63 MPa	99	3,8 kg	1 (13 x 36 mm)
TMH-6000C2 TMH-6000P2E	0,4 - 0,63 MPa	124	7,6 kg	2 (13 x 36 mm)

*C = Cord control / P = Pendant control

DIMENSIONS IN MM

Model	A	B	C	D	E	F	H0	I
TMH-3000	537	314	189	125	265	311	50	34
TMH-6000	742	371	245	126	265	311	65	42

All measurements are in mm / Information subject to change without notice